




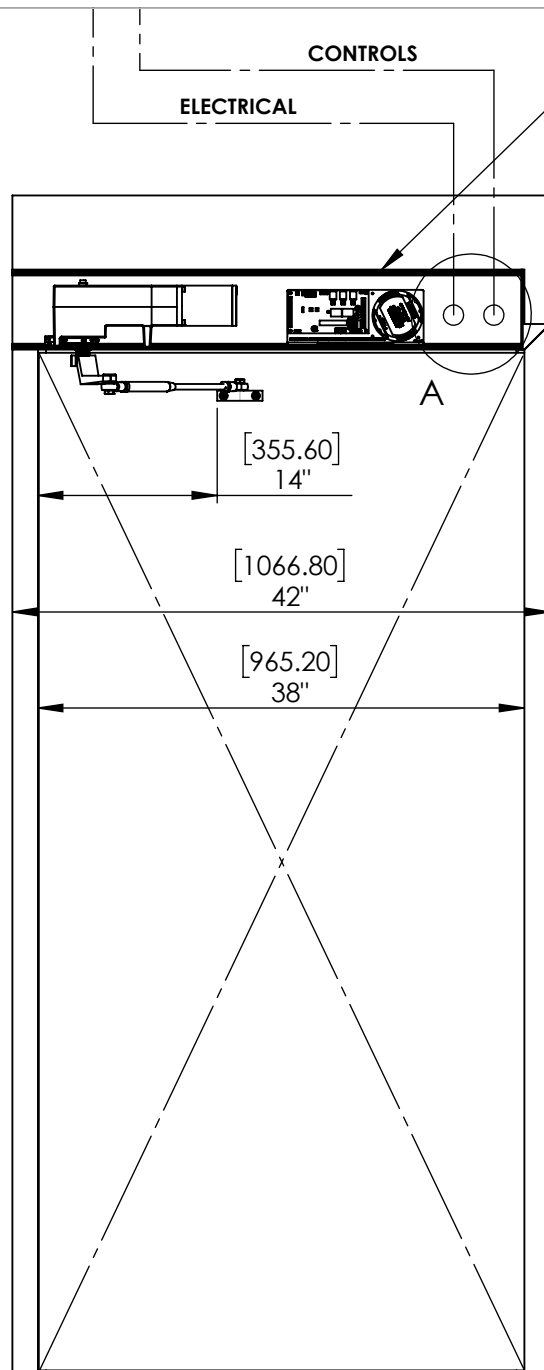


CONTROLS
ELECTRICAL

**STANDARD PROFILE
40" (1016mm) HEADER**




DETAIL A
SCALE 1 : 6

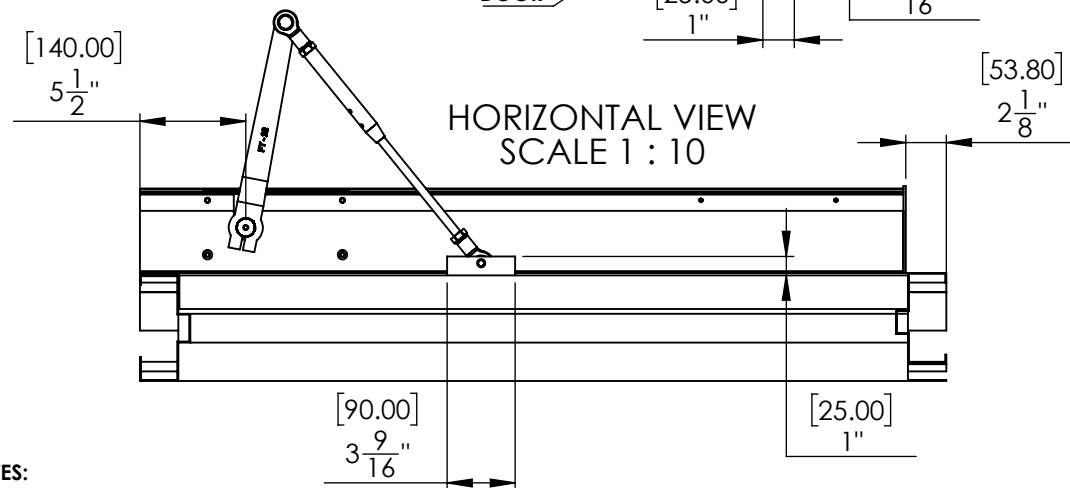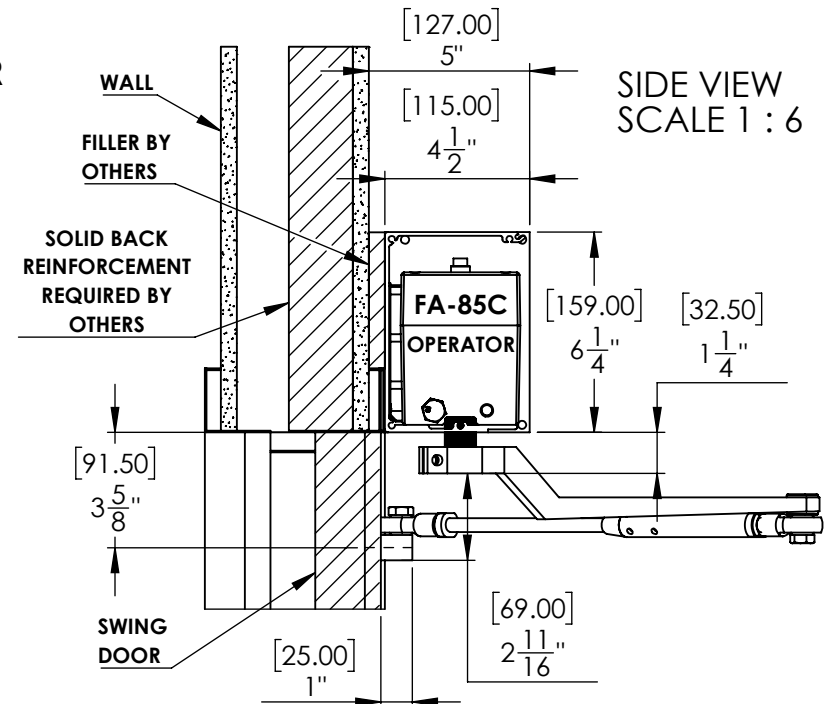

NOTES:

1. ELECTRICAL REQUIREMENTS:
120V, 5AMPS MIN TO BE
SUPPLIED BY ELECTRICAL CONTRACTOR
2. DOOR(S), FRAME(S) AND HARDWARE
TO BE SUPPLIED BY OTHERS
3. MIN 32" CLEAR DOOR OPENING AT 90°
REQUIRED AS PER A.D.A REQUIREMENTS
4. DOORS MUST BE UNLATCHED OR
EQUIPPED WITH APPROVED FAIL
SAFE/SECURE DOOR STRIKE
5. OPERATOR HEADER IS AVAILABLE IN
CUSTOM SIZING

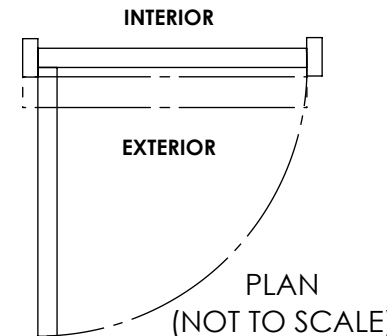

DOOR AUTOMATION

**PUSH EGRESS
APPLICATION**

**FA-85C
SWING DOOR OPERATOR**

WEIGHT	SHEET
	1 OF 1