
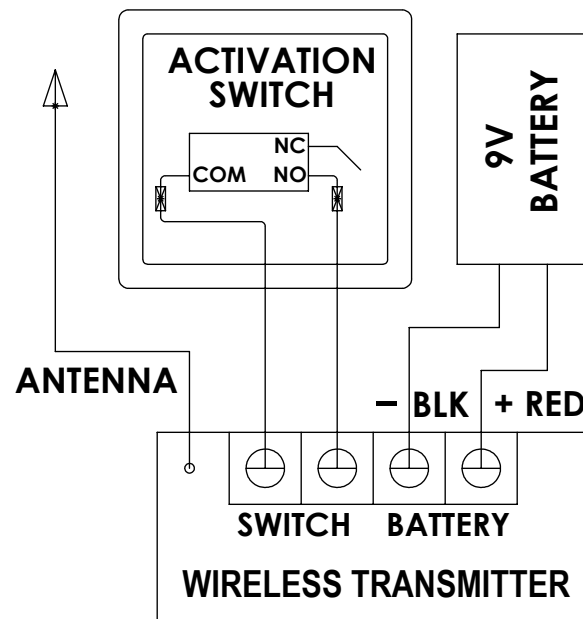


WIRELESS DOOR ACTIVATION WIRING GUIDE

FA-43TR WIRELESS KIT

NOTE:

Supply 24VDC via Door Operator
or Separate Power Supply

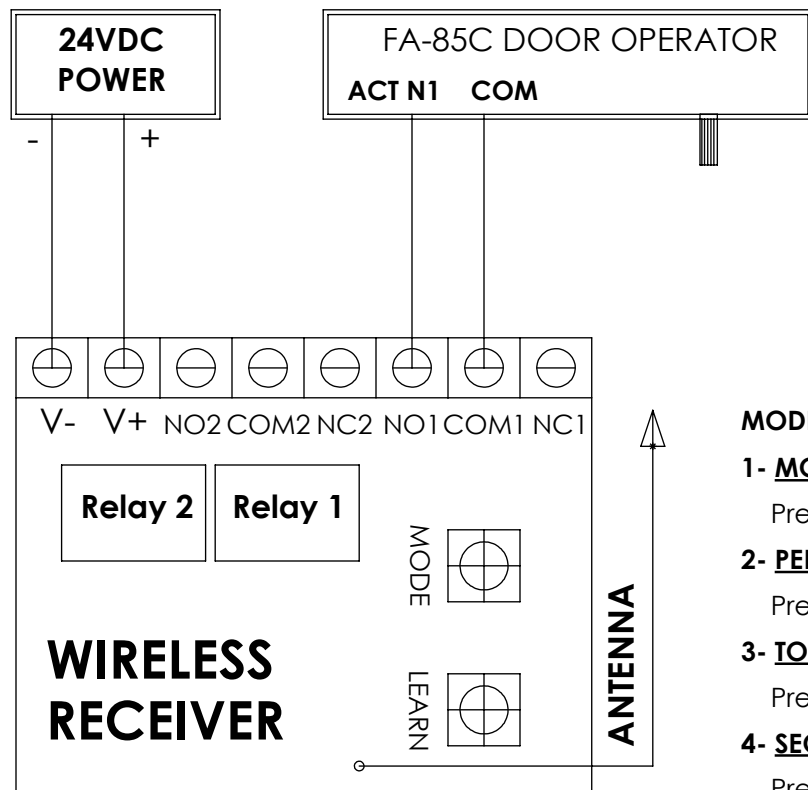

MODE CYCLING:

1- MOMENTARY

Press and release MODE BUTTON 1 time **quickly**.

2- PERMANENT (LATCHED)

Press and release MODE BUTTON 2 times **quickly**.

3- TOGGLE

Press and release MODE BUTTON 3 times **quickly**.

4- SEQUENTIAL

Press and release MODE BUTTON 4 times **quickly**.

PAIRING: To pair with **RELAY 1**, press and release the LEARNING BUTTON 1 time and immediately activate transmitter switch repeatedly to pair.

For **RELAY 2**, press and release the LEARNING BUTTON 2 times **quickly** and immediately activate transmitter switch repeatedly to pair.

RESET: Press and hold LEARNING BUTTON for 10 seconds to clear all paired devices.



NOTE :- For touchless / wave switches refer to product manual for detailed wiring instructions